



**VITS**  
VANJUST TESTING  
INSPECTION SERVICE



中国认可  
国际互认  
检测  
TESTING  
CNAS L9713

## Test Report

No.: W2305678

Date: 2023-05-15

Page 1 of 8

**Applicant** : Vestergaard A/S

**Address** : Jegindoevej 21 8800 Viborg Denmark

### Sample Description:

Name of Product / Item : REMOTE CONTROL CAR SERIES

Item No. : See Next Page

Above sample information was submitted and/or identified by client

Quantity of Sample : 1 set

Remark : WJ20230406089-01

Sample Receiving Date : 2023-04-06

Testing Period : 2023-04-06 TO 2023-04-14

### TESTING REQUEST

Annex XVII of European regulation (EC) No. 1907/2006 (REACH) with Amendment(s)  
No.552/2009 & No.494/2011 & No.835/2012.

- Cadmium and its compounds

### CONCLUSION

**PASS**

\*\*\*\* AS REQUESTED BY THE APPLICANT, PLEASE REFER TO THE FOLLOWING PAGE(S) FOR DETAILS\*\*\*\*

Signed for and on behalf of  
Guangdong Vanjust Testing Technology  
Co., Ltd

*Nancy*



Nancy Wang  
Toy Laboratory Manager



scan to see the report

**Guangdong Vanjust Testing Technology Co., Ltd**  
Room 201, Building A, Guanghua Industrial Zone, Longtian  
Community, Guangyi Street, Chenghai District, Shantou,  
Guangdong, China (515800)  
Tel:(86-754)87211449 Email:lab@vanjust.com

This document cannot be reproduced except in full, without prior approval of our laboratory. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



## Test Report

No.: W2305678

Date: 2023-05-15

Page 2 of 8

### Item No.:

UJ99-P220,UJ99-P221,UJ99-P222,UJ99-P223,UJ99-Y240,UJ99-Y241,UJ99-Y242,UJ99-Y243,  
UJ99-T200,UJ99-T201,UJ99-T202,UJ99-T203,UJ99-F160,UJ99-F161,UJ99-F162,UJ99-F163,UJ99-F120,  
UJ99-F121,UJ99-F122,UJ99-F123,UJ99-101,UJ99-102,UJ99-103,UJ99-105,UJ99-106,UJ99-107,UJ99-P261,  
UJ99-P262,UJ99-P267,UJ99-P268,UJ99-P265,UJ99-P266,UJ99-N160,UJ99-N161,UJ99-N162,UJ99-N163,  
UJ99-N167,UJ99-N168,UJ99-Y181B,UJ99-Y182B,UJ99-Y183B,UJ99-Y185B,UJ99-Y186B,UJ99-Y187B,  
UJ99-Y188B,UJ99-Y181,UJ99-Y182,UJ99-Y183,UJ99-Y185,UJ99-Y186,UJ99-Y187,UJ99-Y188,  
UJ99-1210B,UJ99-1211B,UJ99-1212B,UJ99-2212B,UJ99-2211B,UJ99-2215B,UJ99-1215B,UJ99-P181,  
UJ99-P182,UJ99-P183,UJ99-P185,UJ99-P186,UJ99-P187,UJ99-P161,UJ99-P162,UJ99-P167,UJ99-P168,  
UJ99-P165,UJ99-P166,UJ99-T180,UJ99-T181,UJ99-T182,UJ99-T183,UJ99-D160,UJ99-D161,UJ99-D162,  
UJ99-D163,UJ99-N01



## Test Report

No.: W2305678

Date: 2023-05-15

Page 3 of 8

### Test Results

#### ▼ **Cadmium and its compounds**

Method: EN1122: 2001 Method B

Analysis was performed by AAS.

<u>Tested Item(s)</u>	<u>Result (mg/kg)</u>	<u>MDL</u>	<u>Limit</u>
		1	(mg/kg)
Cadmium (Cd)	N.D.	5	100

<u>Tested Item(s)</u>	<u>Result (mg/kg)</u>	<u>MDL</u>	<u>Limit</u>
		2+3	(mg/kg)
Cadmium (Cd)	N.D.	5	1000

#### **Specimen Description:**

- 1 Multicolor coating
- 2 Black soft plastic
- 3 Black soft plastic

#### **Note:**

- MDL = Method Detection Limit
- N.D. = Not Detected (<MDL)
- mg/kg = ppm = parts per million
- 1000mg/kg = 0.1%
- The limit for composite test should be divided by the mixed number.
- The mixed test may result in false negative results, test per the client's request and the results for reference only
- As per client's request, test conducted on specified materials.
- All result(s) is(are) extracted from report No.:W2303323R1, where the sample(s)/material(s) of sample is(are) claimed to be identical.




**Remark:**


1. Since the data and/or information above division line of front page is provided by the applicant, the relevant results or conclusions of this report are only made for these data and/or information, VITS shall not be responsible for the authenticity and integrity of such data and information and the validity of the results and/or conclusions arising therefrom. Testing results only apply to the sample as received.
2. If relevant standards do not specify decision rule(s), follow decision rule as below:
  - "Pass" means that the measured result is within the limits, even when extended by expanded uncertainty at a level of confidence of 95%.
  - "Fail" means that the measured result is beyond the limit, even when extended by expanded uncertainty at a level of confidence of 95%.



**Sample Photo**

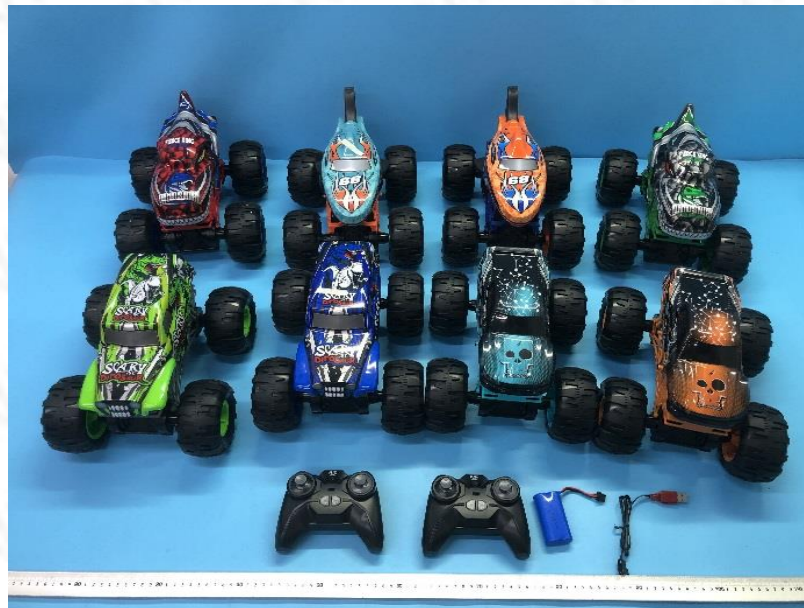



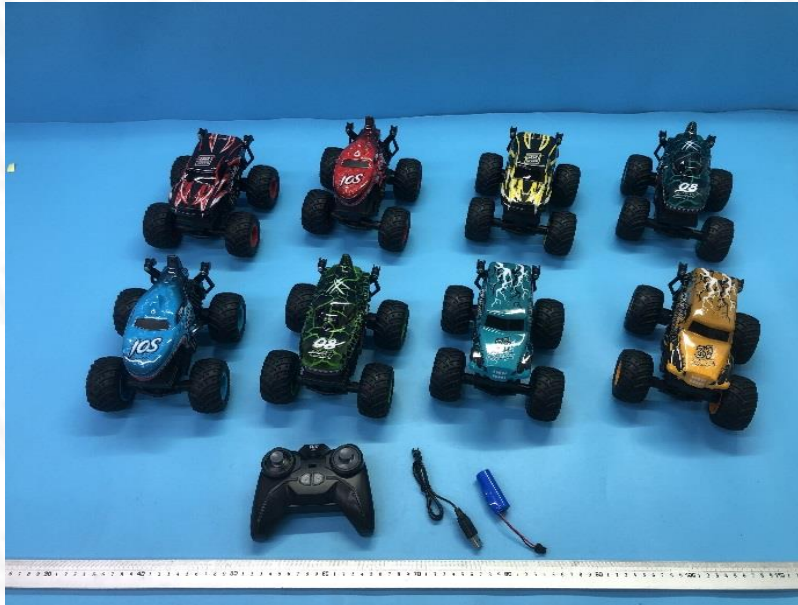



Vanjust Testing authenticate the photo on original report only

\*\*\* End of Report \*\*\*